

APP CRS	Rwy Idg	8505
217°	TDZE	770
	Apt Elev	809



RNAV (RNP) Z RWY 22
SAN ANTONIO INTL (SAT)

RNP AR APCH - GPS. Authorization required.
From BRSQT: Min RNP 0.50. From NADDE: RF.

MISSED APPROACH: (Do not exceed 195K until IMIKE) Climb to 3100 direct IMIKE and on track 137° to EMBOW and hold.

For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C.

D-ATIS	SAN ANTONIO APP CON	SAN ANTONIO TOWER	GND CON	CLNC DEL	CPDLC
118.9	125.1 307.0	119.8 257.8	121.9 348.6	126.7	

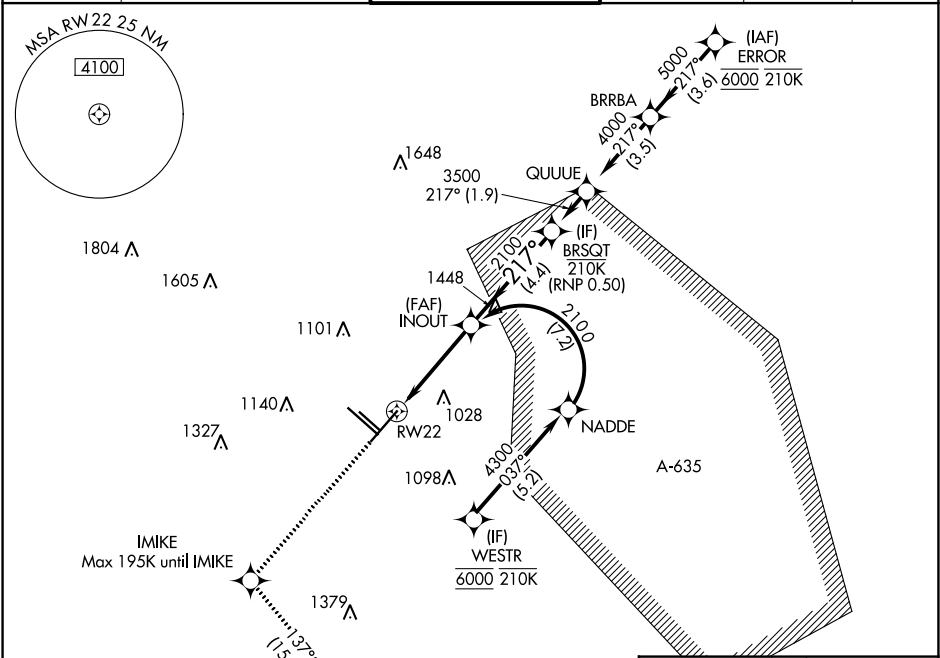

3100	IMIKE	EMBOW	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 85).
↑	✱	tr 137°	
See planview for multiple IF locations.			
RW22			
217°			
2100			
GP 3.00° TCH 55			
4.1 NM			
CATEGORY	A	B	C
RNP 0.15 DA	1068-7/8 298 (300-7%)		
RNP 0.30 DA	1220-13/8 450 (500-13%)		
AUTHORIZATION REQUIRED			

