

WAAS CH 87116 W20A	APP CRS 205°	Rwy Idg TDZE Apt Elev	5600 568 571
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 20

DANVILLE RGNL (DAN)

RNP APCH.


▼

⚠

Baro-VNAV NA when using Roxboro, NC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Roxboro, NC altimeter setting and increase all DA 62 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile and LNAV Cats C and D ¼ mile. VDP NA with Roxboro, NC altimeter setting.

MISSED APPROACH: Climb to 2500 direct LANTA and hold.

ASOS 128.125	WASHINGTON CENTER 124.05 352.0	UNICOM 123.05 (CTAF) 0
------------------------	--	----------------------------------

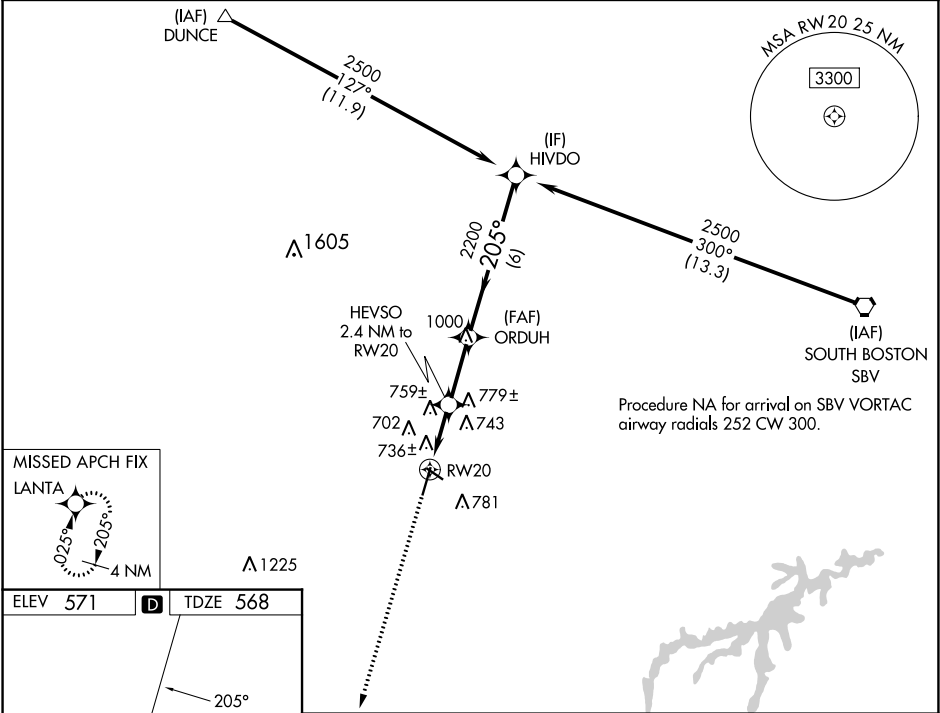

ELEV 571

D

TDZE 568

2500

LANTA

*LNAV only.

RW20

HEVSO 2.4 NM to RW20

ORDUH

HIVDO

2500

2200

2200

1380*

Procedure Turn NA

GP 3.00°

TCH 50

1.3 NM	1.1 NM	2.5 NM	6 NM		
CATEGORY	A	B	C	D	
LPV	DA	768-1	200 (200-1)		
LNAV/VNAV	DA	1026-1½	458 (500-1½)		
LNAV MDA		1020-1	452 (500-1)	1020-1¼ 452 (500-1¼)	1020-1½ 452 (500-1½)