

LOC I-DRI 111.1	APP CRS 355°	Rwy Idg TDZE 197 Apt Elev 202	LOC RWY 36 BEAUREGARD RGNL (DRI)
---------------------------	------------------------	---	-------------------------------------

▼



NA

Inoperative table does not apply. ADF required. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDAs 60 feet and S-36 visibility Cat C ½ SM and Circling Cats C/D visibility ¼ SM.

ODALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.

AWOS-3PT 118.225	POLK APP CON 123.7 261.3	UNICOM 122.8 (CTAF)
----------------------------	------------------------------------	-------------------------------

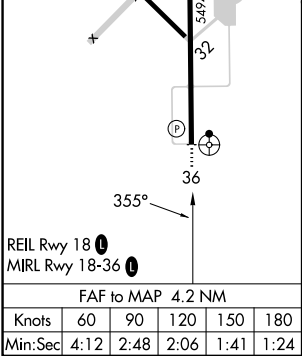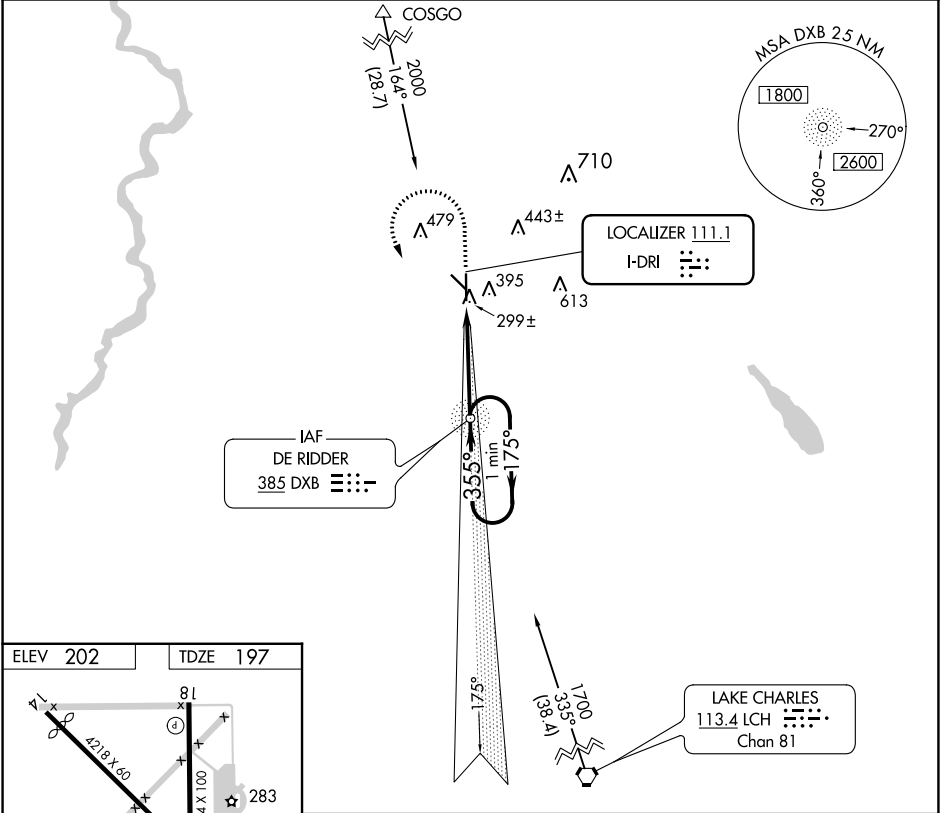

1000	1700	DXB	DXB NDB	One Minute Holding Pattern
VGSi and descent angles not coincident (VGSi Angle 3.00/TCH 50).				
CATEGORY	A	B	C	D
S-36	560-1 363 (400-1)			560-1¼ 363 (400-1¼)
CIRCLING	720-1 518 (600-1)		780-1½ 578 (600-1½)	1000-2½ 798 (800-2½)

SC-4, 18 APR 2024 to 16 MAY 2024

SC-4, 18 APR 2024 to 16 MAY 2024