

NDB DXB

385

APP CRS

354°

Rwy Idg

5494

TDZE

197

Apt Elev

202

NDB RWY 36

BEAUREGARD RGNL (DRI)

▼



NA


Inoperative table does not apply. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDAs 60 feet and S-36 visibility Cat D 1/8 SM and Circling Cats C/D 1/4 SM.

ODALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.

AWOS-3PT	POLK APP CON	UNICOM
118.225	123.7 261.3	122.8 (CTAF) 0

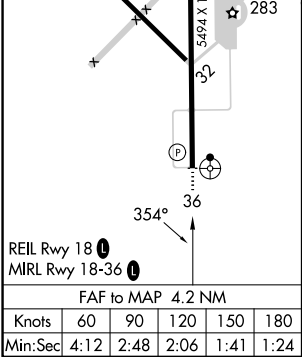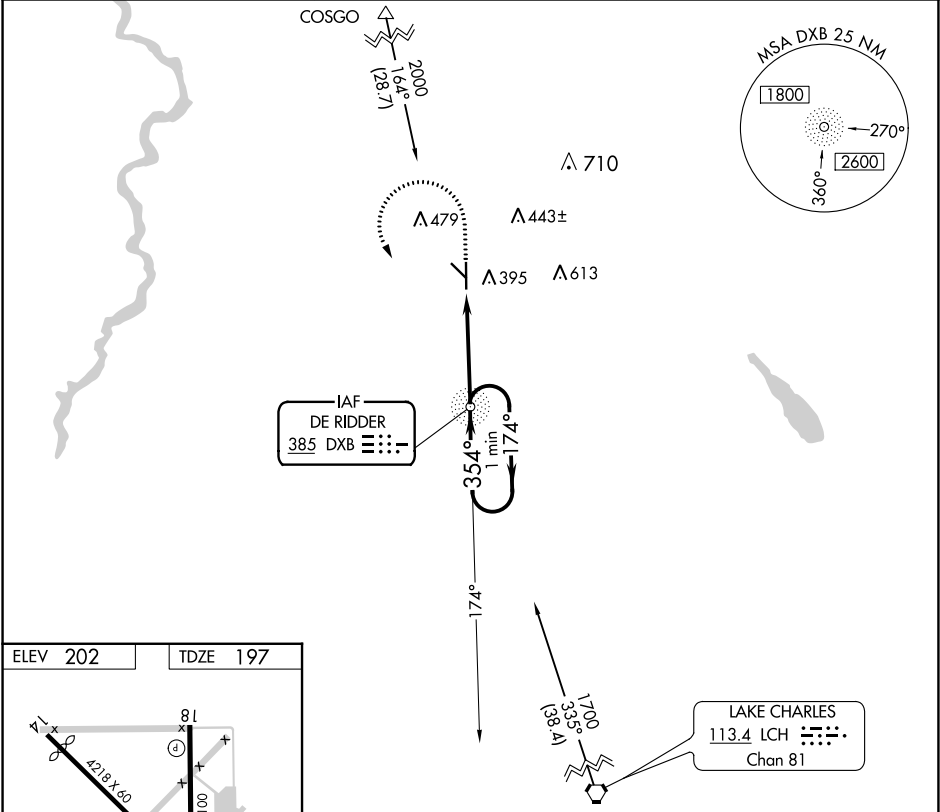

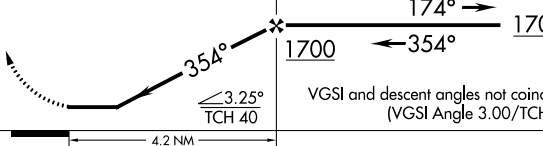1000 ↑ 1700  DXB  DXB NDB  One Minute Holding Pattern				
4.2 NM				
CATEGORY	A		B	
S-36	700-1 503 (500-1)		700-1½ 503 (500-1½)	
CIRCLING	720-1 518 (600-1)		780-1½ 578 (600-1½)	1000-2½ 798 (800-2½)

SC-4, 18 APR 2024 to 16 MAY 2024

SC-4, 18 APR 2024 to 16 MAY 2024