

MERIDIAN, MISSISSIPPI

ILS W or LOC/DME W RWY 19L

LOC/DME I-NMM 109.7 Chan 34	APCH CRS 191°	Rwy Idg TDZE Arpt Elev 8000 316 316
---	-------------------------	---

AL-5079 [USN]

MERIDIAN NAS (MC CAIN FIELD) (KNMM)

RADAR required * When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase CAT AB vis to 1 mile, CAT CD vis to 1½ miles.	MALSR A5	MISSED APPROACH: Climb to 800, then climbing left turn to 2100 to intercept NMM R-141 to UBERY and hold.
--	-------------	--

ATIS ★ 290.525	APP CON 120.95 276.4	NAVY MC CAIN TOWER ★ 126.2 340.2	GND CON 336.4	CLNC DEL 301.0	ASR/PAR
--------------------------	--------------------------------	--	-------------------------	--------------------------	---------

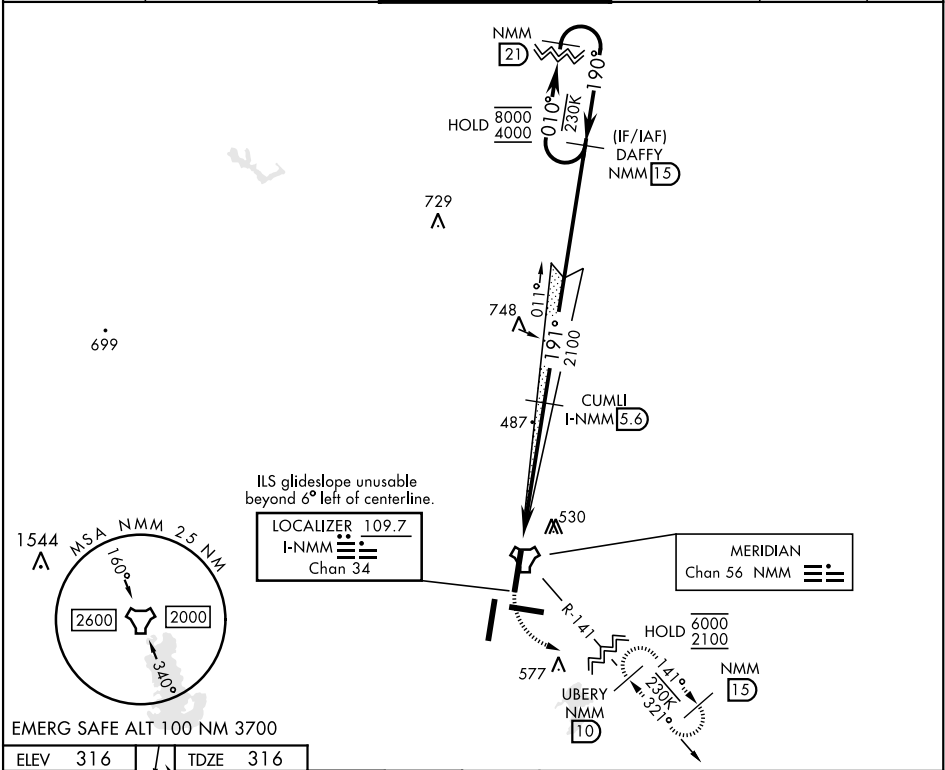


Diagram illustrating the HIRL all rwy and Wave-Off Lgt Rwy 1L, 19L. Key features include: A5, 161, 191°, 161 DOWN 8000 x 200, 0.6% DOWN, 1R, TWR, 10, 6402 x 200, 28, 0.3% UP, 8003 x 200, 1L, A1.

Diagram illustrating the approach path for the 191° course. Key features include: 800, 2100, UBERY NMM 10, CUMLI I-NMM 5.6, DAFY NMM 15, NMM 21, 010°, 190°, 8000, 4000, GS 3.00°, TCH 49. The approach path is shown with a 191° heading and a 4.9 NM distance.

CATEGORY	A	B	C	D
S-ILS 19L *	516-½	200	(200-½)	
S-LOC 19L **	740-½	424 (500-½)	740-¾	424 (500-¾)
CIRCLING	820-1 504 (600-1)	840-1 524 (600-1)	840-1½ 524 (600-1½)	880-2 564 (600-2)

MERIDIAN, MISSISSIPPI

32°33'N-88°33'W

MERIDIAN NAS (MC CAIN FIELD) (KNMM)

Orig 01DEC22

ILS W or LOC/DME W RWY 19L

SC-4, 21 MAR 2024 to 18 APR 2024

SC-4, 21 MAR 2024 to 18 APR 2024